



SCHEMATIC :

(NOTE 1)

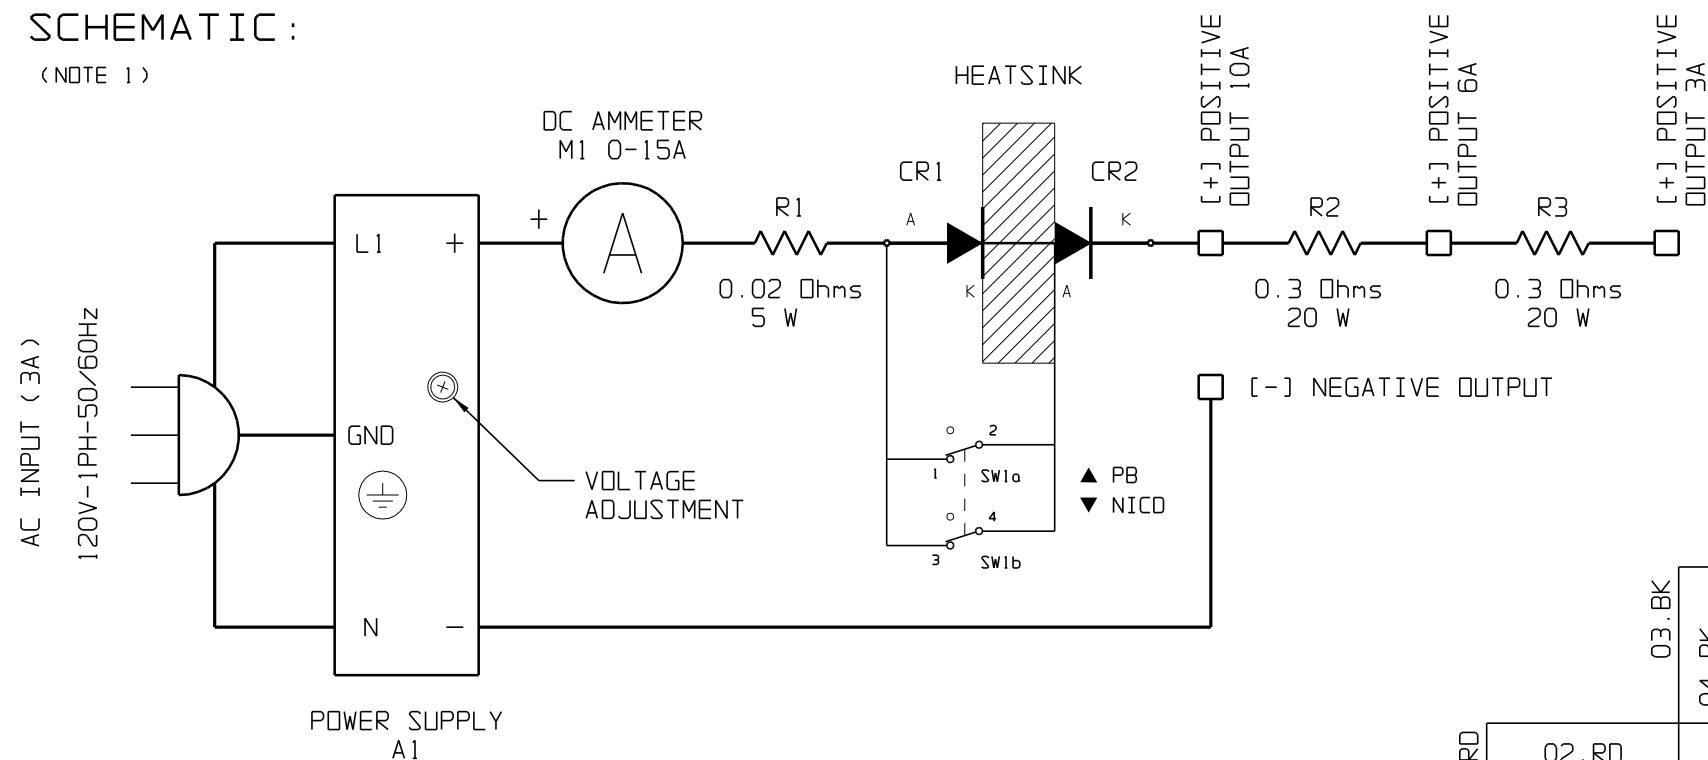

CONNECTION DIAGRAM :

(NOTE 2)

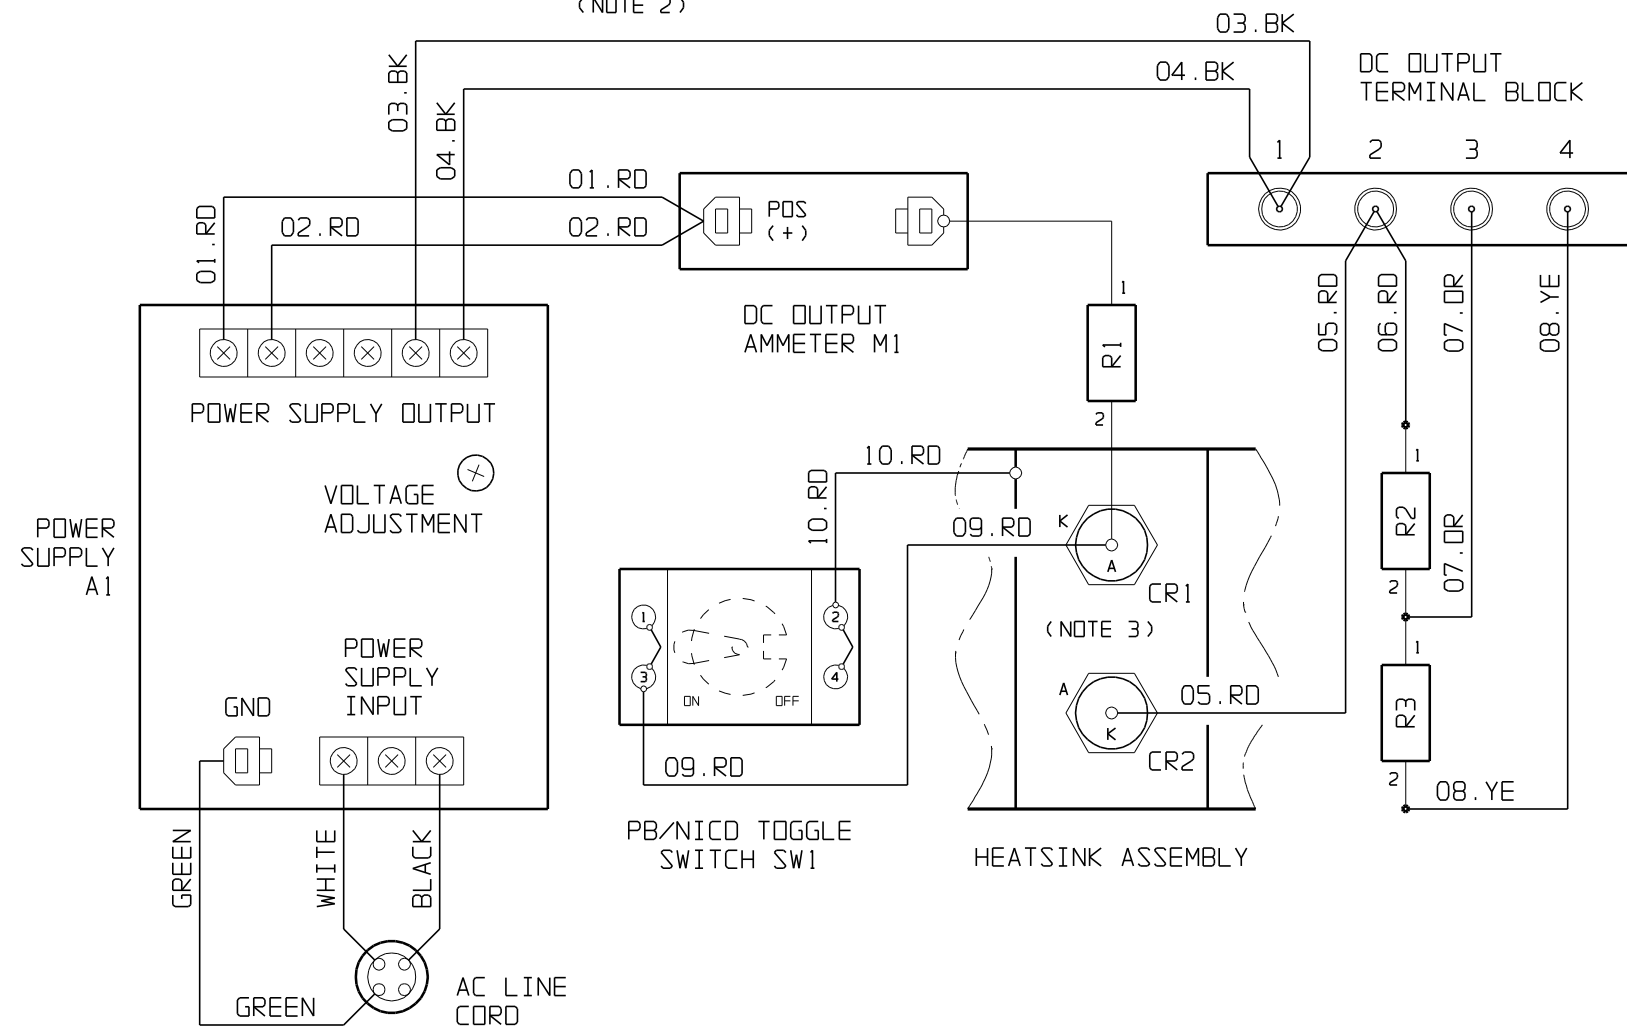

NOTES :

- 1) SEE USER INSTRUCTIONS ATTACHED TO INSIDE TOP LID OF CHARGER:
 - A) JC5001-00
 - B) JC5001-02
 - C) JC5001-03
- 2) ALL WIRING IS #18 AWG PVC TYPE UNLESS OTHERWISE SPECIFIED.
- 3) !!! NOTICE !!! - CR1 & CR2 DIODES ARE DIFFERENT PARTS:
 - CR1 IS CATHODE-MOUNTED, WIRE TO ANODE
 - CR2 IS ANODE-MOUNTED, WIRE TO CATHODE

CONNECTION LEGEND :

- 0.25 QUICK CONNECT
- SOLDERED CONNECTION
- COMPRESSION TYPE CONNECTION

3	25974	051117	MCT	THIRD ANGLE PROJECTION	DRAWN BY MCR 040903 APPROVED <i>[Signature]</i> 040903	TITLE SCHEMATIC / CONNECTION DIAGRAM: SINGLE-CELL BATTERY CHARGER (BB0442-01)		
2	23802	071513	MCT			DRAWING No JE5066-00		REV 3
1	20380	101806	MCT	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:			SCALE NTS	
0	E1207	040903	<i>[Signature]</i>				PART No JE5066-00	
REV	ECN No	DATE	APP			FILENAME [JE5066-00.PRT]		