



BACK SIDE OF FRONT DOOR

(NOTE 5)

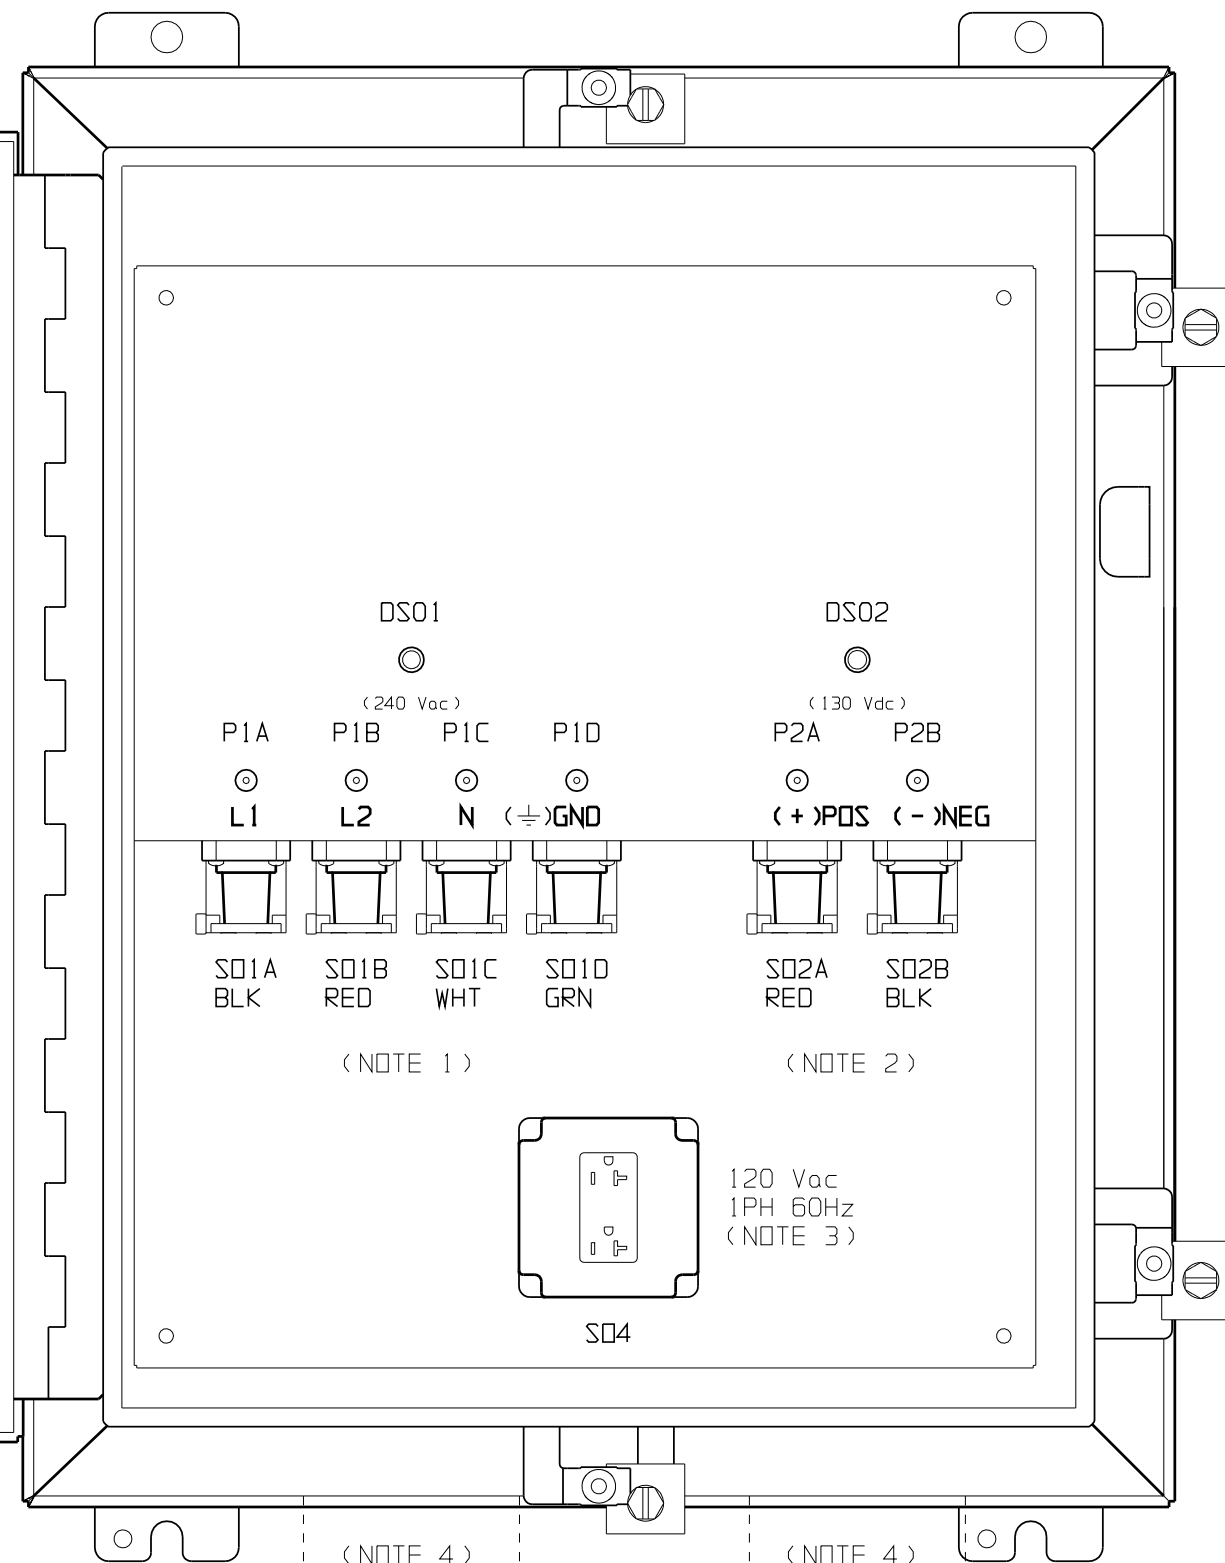


SYM	STANDARD COMPONENT DESCRIPTION
DS01	AC POWER INDICATOR (GREEN)
DS02	DC POWER INDICATOR (GREEN)
P1A	LINE 1 AC TEST POINT
P1B	LINE 2 AC TEST POINT
P1C	NEUTRAL TEST POINT
P1D	GROUND TEST POINT
P2A	POSITIVE (+) DC TEST POINT
P2B	NEGATIVE (-) DC TEST POINT
S01A	LINE 1 AC CONNECTOR
S01B	LINE 2 AC CONNECTOR
S01C	NEUTRAL AC CONNECTOR
S01D	GROUND CONNECTOR
S02A	POSITIVE (+) DC CONNECTOR
S02B	NEGATIVE (-) DC CONNECTOR
S04	120Vac 1PH 60Hz 20A GFI OUTLET

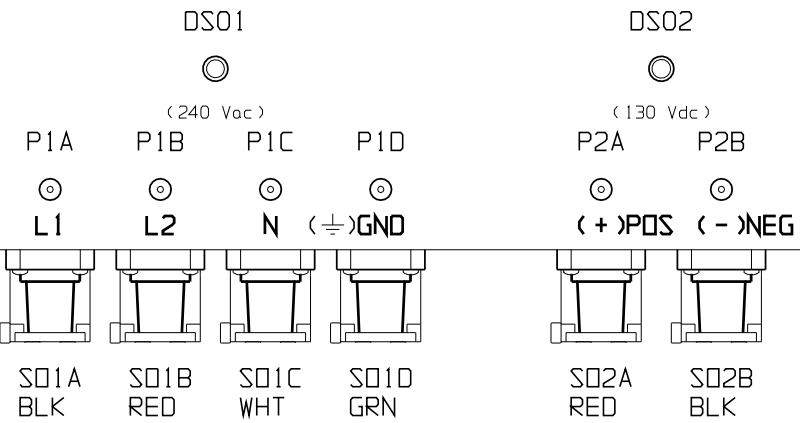

(NOTE 1)

(NOTE 2)



120 Vac  
1PH 60Hz  
(NOTE 3)

(NOTE 4)

(NOTE 4)

- NOTES:
- 1) AC CONNECTORS (S01x) ACCEPT "HUBBLE" TYPE FEMALE PLUGS FEATURED ON AC CABLE REELS OF MOBILE DC SYSTEM. RATED FOR 400A.
  - 2) DC CONNECTORS (S02x) ACCEPT "HUBBLE" TYPE MALE PLUGS FEATURED ON DC CABLE REELS OF MOBILE DC SYSTEM, RATED FOR 400A.
  - 3) GFI OUTLET (S04) 120 Vac SOURCED FROM SITE AC PANEL, NOT FROM 240 Vac SPLIT-PHASE (S01x), POWERING MOBILE DC SYSTEM.
  - 4) ENCLOSURE FEATURES TWO (2) 4.50in / 114mm BOTTOM-ACCESS HOLES, WITH THREE (3) INTERNAL PLUGS AND LANYARDS SUPPLIED.
  - 5) OPERATING PROCEDURE LISTED ON ENGRAVED PLATE AFFIXED TO INSIDE PANEL DOOR. FOR FURTHER DETAILS, SEE USER INSTRUCTIONS JA5115-00.

			 THIRD ANGLE PROJECTION		TITLE TRAILER CONNECTION PANEL (TCP) INTERNAL COMPONENT / CONNECTION LAYOUT	
B	-N/A-	031720	DRAWN BY MCR ELECTRONIC APPROVAL SIGNATURES MAINTAINED BY MFG ECN LOG	DRAWING No JE5278-11		REV B
A	-N/A-	062518	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:	SCALE NTS		PART No JE5278-11
REV	ECN No	DATE			SHEET 1 OF 1	<b>B</b>